






HEATING SOLUTIONS

Bromic Plumbing & Gas has been at the core of Bromic Group's operations for the last 40 years. Over that time it has grown to provide thousands of high-quality products, to industries across Australia, New Zealand, and the Pacific Islands. We are pleased to present new Plumbing & Gas catalogues to provide you with complete information about our products. Each product has passed demanding quality assurance testing to maintain the stringent standards that position Bromic Plumbing & Gas as the only name truly trusted by trade.



About

Our heating products cover commercial, industrial, outdoor & indoor applications. Our SUPAHEAT heater is for indoor use while our HEAT-FLO™ Tile heaters can provide outdoor heating at an accessible price point. The HEAT-FLO™ blow heaters are highly efficient and provide instant & economical heat for industrial or commercial applications. With our products available in multiple fuel types including LPG (Propane) and Natural Gas we have a product for all fuel requirements.

Contents

Supaheat™ Indoor Gas Heater	4
Natural convection heating with electronic ignition & multiple heat settings. Available in LPG or Natural Gas. AGA Approved.	
Patio Heater Deluxe 50MJ Direct Ignition	4
Portable outdoor heating made easy using 9kg or 15kg LPG bottles. AGA Approved.	
HEAT-FLO™ Tile Heaters	5
Radiant heating which can heat up to 25m ² . Available in a stylish steel finish with multiple installation options available.	
HEAT-FLO™ Blow Heaters	6
Providing instant, economical heat powered by a heavy-duty, high-output fan. Featuring an automatic safety shut-off with loss of flame or power. Gas & electrical approval.	
Warranties & Extras	7

Heating Solutions

Supaheat™ Indoor Gas Heater

The Bromic flueless Supaheat™ II LPG indoor gas heater is specifically designed to heat up a room, instantly and efficiently.

- High and Low heat settings
- Battery operated electronic ignition
- High efficiency energy rating
- Efficient room heating: top vent for natural convection
- AGA approval No. 8271 G
- Maximum carton weight 11kg



High efficiency energy ratings for both Natural Gas and LPG models.

Patio Heater Deluxe 50MJ Direct Ignition

- Commercial grade 304 stainless steel for maximum durability
- Large aluminium alloy reflector
- Durable wheels for easy moving
- Flat-top cylinder housing
- Piezo-electric direct ignition for trouble free lighting
- Stainless steel burner ensures maximum heater life
- Safety tilt switch shut-off
- Includes protective burner cover
- AGA approved
- Replacement burner head: COMP772

4

Flueless Room Heaters



Part No.	COMP731-1	COMP732-1
Gas Supply Type	LPG	NG
Heat Output (MJ/H)	21	18
Colour	Silver grey	Silver grey
Electronic Ignition	Type "C" 1.5 battery	
Dimensions in mm (W x D x H)	620 x 280 x 530	

*Cannot be directly connected to a gas cylinder
**Must be installed by an authorised person only

Outdoor Heaters



50 MJ
HEAT
OUTPUT

Part No.	COMP710-3
Heats approx. (m ²)	28m ²
Cylinder compatibility	15kg & 9kg
Height (mm)	2180
Base diameter (mm)	446
Reflector diameter (mm)	813

Outdoor Heaters

Bromic Heat-Flo™ Gas LPG Radiant Heaters

- To be installed by an authorised person in accordance with AS 5601 TM
- For use in outdoor areas (Minimum room volume 250 cubic metres)
- Do not operate this unit in unventilated areas
- This appliance is not approved for indoor domestic use
- Maximum carton weight 13kg
- Available in NG and LPG
- Available in a 3 tile and 5 tile models
- Excludes hose & regulator

Heat-Flo™ Tile Heaters



25 MJ
HEAT
OUTPUT

3-Tile



45 MJ
HEAT
OUTPUT

5-Tile

Accessories


Heat Deflector
(See table for part numbers)



Heat-Flo Surround
(See table for part numbers)



Recommended Minimum Installation Clearances

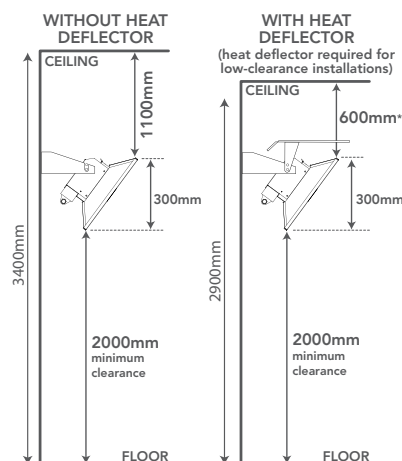

Number of Tiles	3 Tiles	5 Tiles
HEAT-FLO™ Part No. LPG*	2620100-1	2620120-1
HEAT-FLO™ Part No. NG*	2620101-1	2620121-1
Heat Deflector Part No.**	2620162	N/A
HEAT-FLO™ Surround Part No.**	2620161	2620172
Heat Output on LPG (MJ) (BTU)	25MJ (25,300 BTU)	45MJ (42,000 BTU)
Approximate area heated in m ²	up to 16m ²	up to 25m ²
Gas connection	3/8" SAE	3/8" SAE
Gas consumption per 45kg	90 hours approx.	50 hours approx.
Dimensions (WxHxD mm)	499 x 334 x 180mm	695 x 334 x 180mm
Weight (kg)	5.8	7.1
Ceiling clearance required (m)	1.2	1.2
Stand dimensions (WxDxH mm)	480 x 430 x 2100mm	n/a

*Must only be installed by a licensed technician
**Must complete "Installation Checklist" before installing

Commercial & Industrial Heaters

Bromic Heat-Flo™ LPG-Fired Portable Heaters

Bromic HEAT-FLO™ blow heaters efficiently provide portable, instantaneous and economic heat in industrial and outdoor applications.

Lightweight, durable steel bodies house heavy-duty, high output fans and LPG burners to maximise heat circulation.

- Instant Heat: Designed to provide efficient, economical and clean burning heat
- Safe: Heaters shut off with loss of flame or power supply
- Maximum Heat Circulation
- Ready to use: Simple connection. 1.5m Hose and regulator included
- Lightweight: Compact design ensures easy handling
- SAI Global Approved



Heat-Flo™ Blow Heaters



2620401
HF15



2620402
HF20



2620403
HF30



2620404
HF50

Application

Commercial, industrial and outdoor heating applications

Model	HF15	HF20	HF30	HF50
Part No.	2620401	2620402	2620403	2620404
Heat output	54 MJ/h (15kW)	72 MJ/h (20kW)	108 MJ/h (30kW)	170 MJ/h (50kW)
Airflow	500m ³ /H	500m ³ /H	1000m ³ /H	1000m ³ /H
Minimum room volume	270m ³	360m ³	540m ³	900m ³
Automatic safety switch	Yes	Yes	Yes	Yes
Ignition	Piezo	Piezo	Automatic	Automatic
Gas type	LPG (Propane)	LPG (Propane)	LPG (Propane)	LPG (Propane)
Heater type	Forced air convection	Forced air convection	Forced air convection	Forced air convection
Dimensions (mm)	W240 x D500 x H440	W240 x D500 x H440	W280 x D600 x H470	W300 x D700 x H480
Weight	8.5kg	8.5kg	17.5kg	19.5kg
Burner type	Single gas burner	Single gas burner	Single gas burner	Single gas burner
Operating pressure	70 kPa	70 kPa	150 kPa	150 kPa
Electric connection	10A	10A	10A	10A
Power	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz
Motor rating	28W	28W	75W	75W
Gas consumption	1.08 kg/H	1.44 kg/H	2.16 kg/H	3.40 kg/H
Warranty	1 Year	1 Year	1 Year	1 Year

Warranties & Extras

All Bromic products are manufactured to the highest quality standard and come with guarantees against any material or workmanship defects; guarantees that cannot be excluded under Australian Consumer Law. For specific warranty details on any Bromic product, including warranty duration, please refer to the product instructions. Alternatively, contact one of our helpful customer service staff or visit www.bromic.com for more information.

IMAGES, SPECIFICATIONS

Due to the nature of the printing process, colours shown in this catalogue may differ from the actual colour of products. All images, drawings, graphics and design elements contained in this catalogue are subject to Australian and International copyright law. No part of this catalogue may be reproduced, copied or stored in part or whole without the prior written permission of Bromic Pty Ltd. Product details in this guide are indicative only and may change without notice, Bromic reserves the right to change specifications and any other information contained in this catalogue with no recourse from customers.

ORDERING

Orders can be placed by fax, online or email. Our catalogue includes Part No. to ensure ease of use, with the customer in mind.

COMPLIANCE

Products stocked by Bromic comply with all relevant regulatory requirements i.e. MEPS, AGA, electrical and safety requirements.

The logo for BROMIC PLUMBING & GAS. The word "BROMIC" is in a large, bold, black sans-serif font. Above the letter "O" in "BROMIC" are three parallel, slanted yellow lines. Below "BROMIC" is the text "PLUMBING & GAS" in a smaller, bold, black sans-serif font.

BROMIC[®]
PLUMBING & GAS

Australia & NZ

10 Phiney Place
Ingleburn NSW 2565
Sydney AUSTRALIA
Tel: 1300 276 642
NZ: 0508 276 642
plumbing@bromic.com

BROMIC.COM/PLUMBING

V3.1_24/03/2021