
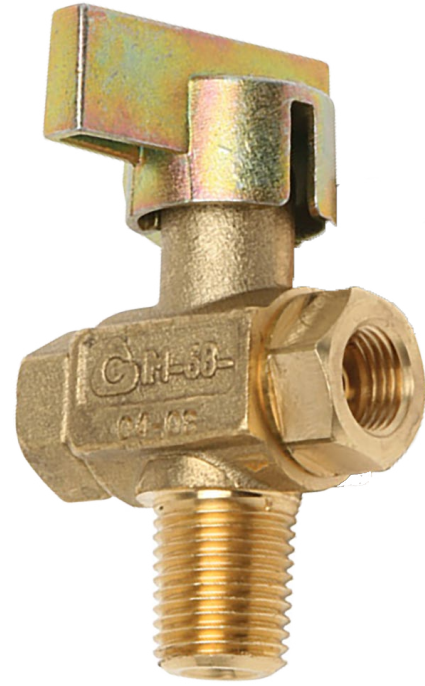


## Bromic Manual Changeover Valve (LPG)

- 100% Pressure Tested
- High quality brass construction
- Working Temperature 0°C to +60°C
- Maximum operating pressure @ nominal temperature 2600 kPa
- Approved by the Australian Gas Association for use with LPG



Part No.	Type	Connection		Dimensions			AGA Approval No.	Pack Quantity
		INLET	OUTLET	A	B	L		
1210302	Female flare	2 x 7/16" Inverted flare	1/4" NPT	60mm	32mm	39mm	4028	10